

Portable Printer

MX20


Model:MX20

Features :

- Drop & Fit label installation design
- IP54 water / dust resistant and 1.5M shock resistant
- Supports both wire (RS232 and USB ports)
- Long standby time up to 72 hours or 300 label cycles between charges



| | |
|---------------|---|
| Print Method | Direct Thermal |
| Resolution | 203 dpi (8dots/mm) |
| Print Speed | Up to 4 IPS (101.6 mm/s) |
| Print Width | 1.89" (48 mm) |
| Print Length | 45" (~1142 mm) |
| Processor | 32 Bit RISC CPU |
| Memory Flash | 128 MB Flash (60 MB for user storage) |
| SDRAM | 32MB |
| Interfaces | RS232 + USB 2.0 port, mini-B type connector Bluetooth 2.1 + EDR |
| Control Panel | 4 dual color LEDs for Power, Battery, Communication, Error status indication. 3 buttons for Power, Feed and BT functions |
| Power Adapter | Switching power supply I/P: 100 / 240 V AC, 50 / 60 Hz, DC 9 V / 2.2 A |
| Battery | Rechargeable DC 7.4 V Lithium-ion battery, 1150 mAh or higher capacitance |
| Environment | Operating Temperature 32 °F to 122 °F (0°C to 50°C) Storage Temperature -4 °F to 140 °F (-20°C to 60°C) |
| Humidity | Operation 10 – 90 %, non - condensing. Storage 10 – 90 %, non - condensing. |
| IP Rating | Intrusion Protection, IP42 requirement for case design, IP54 for protective case |
| Drop Level | 1.5 meter height |
| Dimension | 2.0" x 3.3" x 5.1" (51mm x 84mm x 129.55mm) |
| Weight | 0.72 lbs (325 g), with battery |

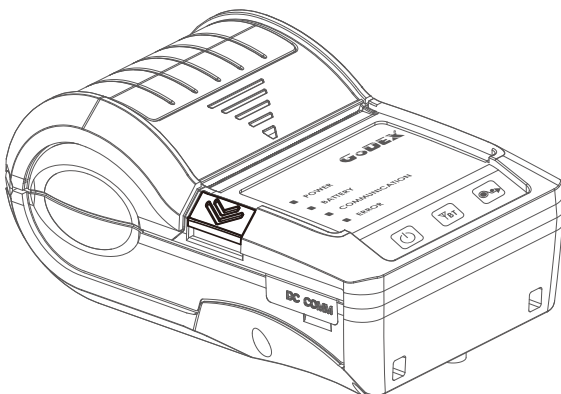

Portable Printer

MX30

Model:MX30

Features :

- Supports multiple label width & types.
- Drop & Fit label installation design.
- Water and dust resistant meeting IP54 standard.
- Versatile interfaces with both wire (RS232 and USB) & wireless (Bluetooth) connectivity.



| | |
|---------------|---|
| Print Method | Direct Thermal |
| Resolution | 203 dpi (8dots/mm) |
| Print Speed | Up to 4 IPS (101.6 mm/s) |
| Print Width | 2.8" (72mm) |
| Print Length | 30" (~762mm) |
| Processor | 32 Bit RISC CPU |
| Memory Flash | 128 MB Flash (60 MB for user storage) |
| SDRAM | 32MB |
| Interfaces | RS232 + USB 2.0 port, mini-B type connector Bluetooth 2.1+EDR |
| Control Panel | 4 dual color LEDs for Power, Battery, Communication, Error status indication. 3 buttons for Power, Feed and BT functions |
| Power Adapter | Switching power supply I/P: 100/240V AC, 50/60Hz, DC 9V / 2.2A |
| Battery | Rechargeable DC 7.4 V Lithium-ion battery, 2500 mAh or higher capacitance |
| Environment | Operating Temperature 32°F to 122°F (0°C to 50°C) Storage Temperature -4°F to 140°F (-20°C to 60°C) |
| Humidity | Operation 10-90%, non-condensing. Storage 10-90%, non-condensing. |
| IP Rating | Intrusion Protection, IP42 requirement for case design, IP54 for protective case |
| Drop Level | 1.5 meter height |
| Dimension | 6.71" x 3.11" x 4.48" (170.63mm x 79mm x 114.01mm) |
| Weight | 1.45 lbs (660g), with battery |

